


Series SPH 100-180
 35 BAR (500 PSI)
 25 BAR (350 PSI) for SPH 180

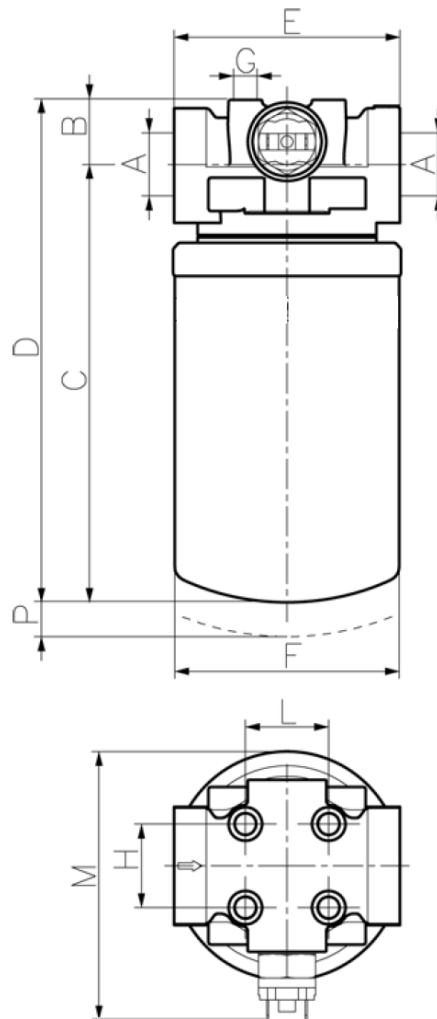

Dimensions:

type	A	B	C	D	E	F	G	H	L	M (O4)	M (E12)	P
SPH 100	3/4"	34 [1.34]	185 [7.28]	219 [8.62]	95 [3.74]	95 [3.74]	M8	38 [1.5]	38 [1.5]	99 [3.90]	112 [4.41]	25 [0.98]
SPH 140	1"	34 [1.34]	260 [10.24]	294 [11.57]	95 [3.74]	95 [3.74]	M8	38 [1.5]	38 [1.5]	99 [3.90]	112 [4.41]	25 [0.98]
SPH 180	1 1/4"	39 [1.54]	330 [12.99]	369 [14.53]	121 [4.76]	117 [4.61]	M10	48 [1.89]	48 [1.89]	130 [5.12]	135 [5.31]	30 [1.18]

Dimensions: mm [inches]

Designs and performance values are subject to change.

Spin-On Filter

Series SPH 100-180

35 BAR (500 PSI), 25 BAR (350PSI)

for SPH 180

Description:

Eaton's spin-on filters are designed to provide one of the highest cleanliness levels for hydraulic systems, featuring cartridges that are engineered to fit into many leading filter systems on the market.

Series SPH filters are available with the following features:

- Compatible with a variety of mediums such as oils, fuels, emulsions, glycol water and synthetic fluids
- Cartridge pressure is 35 bar (500 psi) & 25 bar (350 psi) for SPH180 size
- Cartridge replacement does not require any tooling or equipment to optimize maintenance efficiency
- Other configurations are available upon request

Eaton's spin-on filters are manufactured and tested according to ISO 2941, ISO 3723 and ISO 2942.

1. Type index:

1.1. Complete filter: (ordering example)

SPH. 100. 10VG. G. 4. R. -

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 | **series:**
SPH = high pressure spin-on filter
- 2 | **Nominal size:** 100, 140, 180
- 3 | **filter-material:**
25VG, 10VG, 6VG, 3VG microglass
- 4 | **connection:**
G = BSPP thread connection
NPT = NPT thread connection
- 5 | **connection size:**
4 = 3/4" (SPH 100)
5 = 1" (SPH 140)
6 = 1 1/4" (SPH 180)
- 6 | **bypass valve:**
- = without
R = bypass valve filter Δp 1.75 BAR (25 PSI)
- 7 | **clogging indicator:**
- = without
O4 = visual differential 1.5 BAR (22 PSI)
E12.1,5 = electrical differential 1.5 BAR (22 PSI)

1.2. Filter element: (ordering example)

01SH. 100. 10VG

1	2	3
---	---	---

- 1 | **series**
SH = spin-on cartridge for high pressure filter
- 2 | **nominal size:** 100, 140, 180
- 3 | **filter-material:**
25VG, 10VG, 6VG, 3VG microglass

Technical data:

operating temperature:	-25°C to +110°C (-13°F to +230°F)
operating medium	mineral oil, other media on request
max. operating pressure:	35 BAR (500 PSI), 25 BAR (350 PSI)
opening pressure by-pass valve:	Δp 1.75 BAR (25 PSI)
gasket:	Nitrile (NBR)

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.
Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4).

Pressure drop flow curves:

Curves are calculated in accordance with ISO 3968 and are valid for clean filtering elements.

ΔP changes along with the density in presence of an eddy flow, and along with the dynamic viscosity in presence of a laminar flux.





Curves are valid for mineral oils with density of 0,86 kg/dm³ and a kinematic viscosity of 30 mm²/sec (cSt) (139 SUS).

When choosing the filtering medium consider the pressure losses deriving from the flow rate:

Between 0,3-0,5 bar (4,35-7,25 psi) for filters fitted on return line.


Between 1-1,5 bar (14,5-22 psi) for filters fitted on pressure line.

(The total pressure drop of assembly is to be calculated by sum of housing Δp and the element Δp)

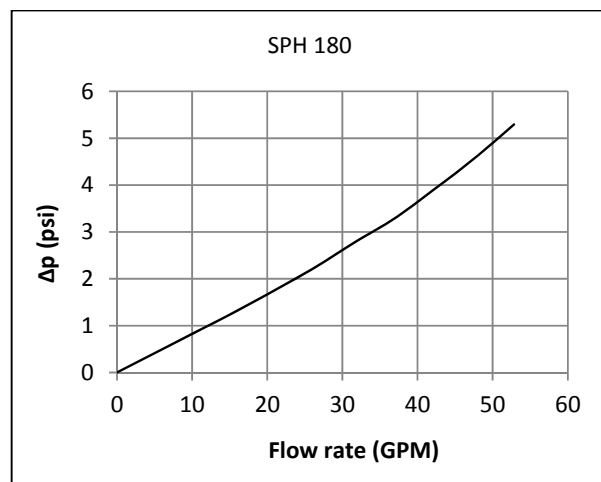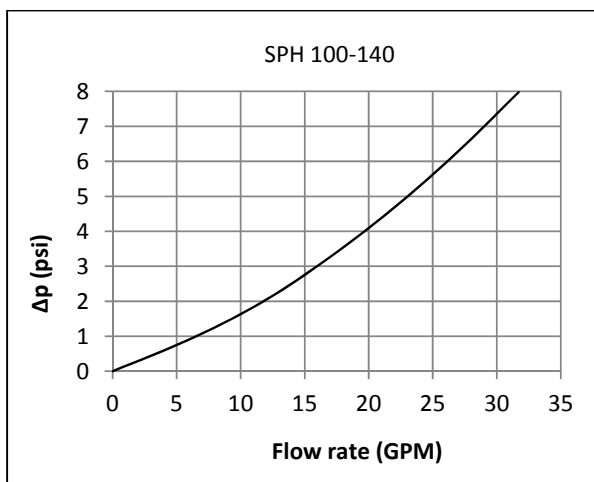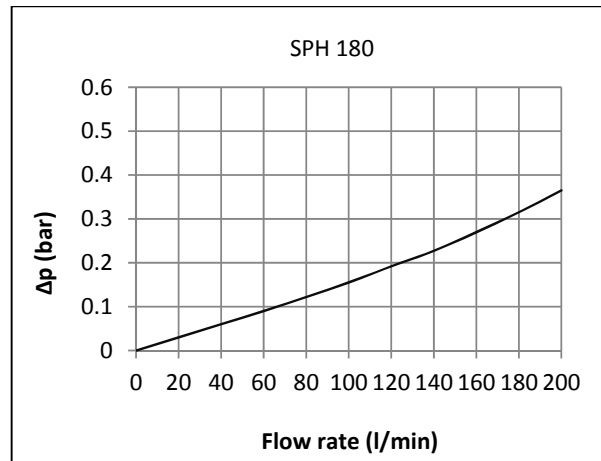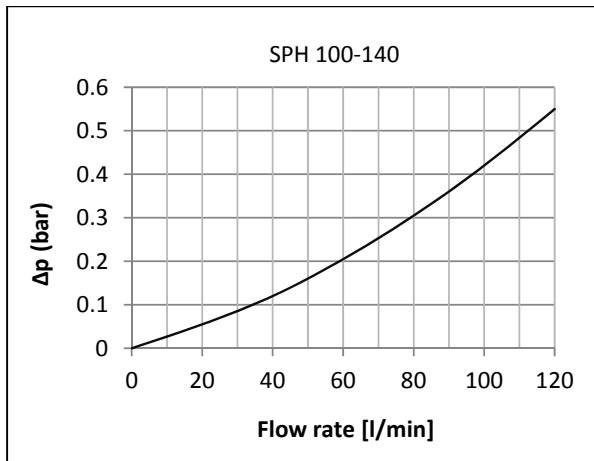


Clogging Indicator:

Dimensions: mm [inches]

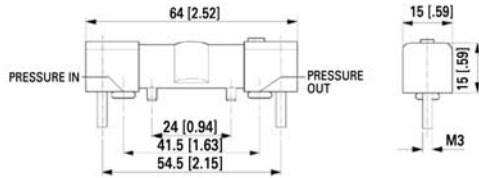


Type: O4 (visual differential)
 Case: Trogramit
 Gaskets: o-ring NBR (viton on request)
 Max working temperature: 110°C (+230°F)
 Setting: 1.5 bar (22 psi)

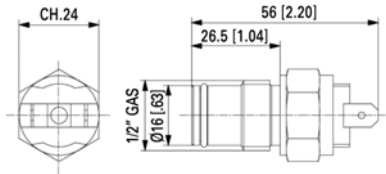

Type: E12 (electrical differential)
 Case: brass
 Gasket: o-ring
 Max switched power: 3W
 Electric contact type: N.A.
 Protection rate: IP65
 Max working pressure: 250 bar (3600 psi)
 Setting: 1.5 bar (22 psi)

Symbols:

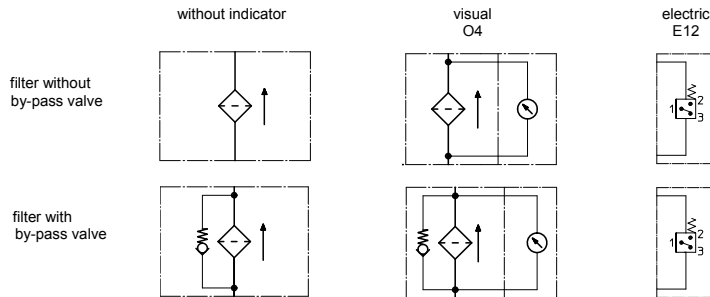

Test methods:

Filter elements are tested according to the following ISO standards:

- ISO 2941 Verification of collapse/burst resistance
- ISO 2942 Verification of fabrication integrity
- ISO 2943 Verification of material compatibility with fluids
- ISO 3723 Method for end load test
- ISO 3724 Verification of flow fatigue characteristics
- ISO 3968 Evaluation of pressure drop versus flow characteristics
- ISO 16889 Multi-pass method for evaluating filtration performance

North America

44 Apple Street
 Tinton Falls, NJ 07724
 Toll Free: 800 656-3344
 (North America only)
 Tel: +1 732 212-4700

Europe/Africa/Middle East

Auf der Heide 2
 53947 Nettersheim, Germany
 Tel: +49 2486 809-0

Friedensstraße 41
 68804 Altlußheim, Germany
 Tel: +49 6205 2094-0

An den Nahewiesen 24
 55450 Langenionsheim, Germany
 Tel: +49 6704 204-0

China

No. 3, Lane 280,
 Linhong Road
 Changning District, 200335
 Shanghai, P.R. China
 Tel: +86 21 5200-0099

Singapore

4 Loyang Lane #04-01/02
 Singapore 508914
 Tel: +65 6825-1668

Brazil

Av. Julia Gaioli, 474 – Bonsucesso
 07251-500 – Guarulhos, Brazil
 Tel: +55 11 2465-8822

For more information, please

email us at filtration@eaton.com

or visit www.eaton.com/filtration

© 2016 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.